

Small Dee Shackles

with type A screw collar pin



Material: Body and pin high tensile steel
Safety Factor: MBL equals 5 x WLL
Standard: B.S.3032 table 1 - 1958
Finish: Self colour
Certificate: As standard an EC declaration of conformity is supplied, also upon request a certificate of basic raw material
Notes: Hot dipped galvanised also available

working load limit	diameter bow	diameter pin	diameter eye	inside width	inside length	product code	weight each
tons	a inch	b inch	c inch	d inch	e inch		kg
0.30	1/4	3/8	3/4	3/8	7/8	SHSDS10	0.06
0.60	3/8	1/2	1	5/8	1.3/8	SHSDS13	0.15
1.00	1/2	5/8	1.1/4	7/8	1.7/8	SHSDS16	0.33
1.75	5/8	3/4	1.1/2	1	2.1/4	SHSDS19	0.61
2.50	3/4	7/8	1.3/4	1.1/4	2.3/4	SHSDS22	0.93
3.50	7/8	1	2	1.3/8	3.1/4	SHSDS25	1.50
4.50	1	1.1/8	2.1/4	1.1/2	3.5/8	SHSDS29	2.15
5.50	1.1/8	1.1/4	2.1/2	1.3/4	4.1/8	SHSDS32	3.02
7.00	1.1/4	1.3/8	2.3/4	1.7/8	4.1/2	SHSDS35	4.20
8.00	1.3/8	1.1/2	3	2.1/8	5	SHSDS38	5.34
10.75	1.1/2	1.3/4	3.1/2	2.3/8	5.1/2	SHSDS44	8.36
13.00	1.5/8	1.7/8	3.3/4	2.1/2	5.7/8	SHSDS48	9.35
14.75	1.3/4	2	4	2.3/4	6.3/8	SHSDS51	12.39
16.75	1.7/8	2.1/8	4.1/4	2.7/8	6.3/4	SHSDS54	15.30
19.00	2	2.1/4	4.1/2	3	7.1/4	SHSDS57	18.40

Small Dee Shackles

with type E bolt and nut pin

Material: Body and pin high tensile steel
Safety Factor: MBL equals 5 x WLL
Standard: B.S.3032 table 1 - 1958
Finish: Self colour
Certificate: As standard an EC declaration of conformity is supplied, upon request a certificate of basic raw material
Notes: Hot dipped galvanised also available

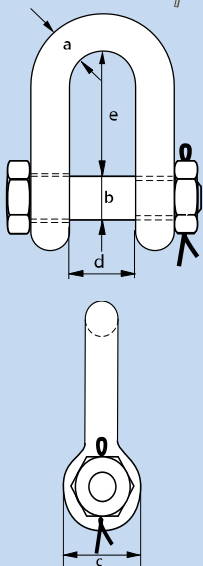

working load limit	diameter bow	diameter pin	diameter eye	inside width	inside length	product code	weight each
tons	a inch	b inch	c inch	d inch	e inch		kg
0.30	1/4	3/8	3/4	3/8	7/8	SHSDB10	0.07
0.60	3/8	1/2	1	5/8	1.3/8	SHSDB13	0.17
1.00	1/2	5/8	1.1/4	7/8	1.7/8	SHSDB16	0.38
1.75	5/8	3/4	1.1/2	1	2.1/4	SHSDB19	0.66
2.50	3/4	7/8	1.3/4	1.1/4	2.3/4	SHSDB22	1.07
3.50	7/8	1	2	1.3/8	3.1/4	SHSDB25	1.76
4.50	1	1.1/8	2.1/4	1.1/2	3.5/8	SHSDB29	2.20
5.50	1.1/8	1.1/4	2.1/2	1.3/4	4.1/8	SHSDB32	3.02
7.00	1.1/4	1.3/8	2.3/4	1.7/8	4.1/2	SHSDB35	4.20
8.00	1.3/8	1.1/2	3	2.1/8	5	SHSDB38	5.34
10.75	1.1/2	1.3/4	3.1/2	2.3/8	5.1/2	SHSDB44	8.36
13.00	1.5/8	1.7/8	3.3/4	2.1/2	5.7/8	SHSDB48	9.35
14.75	1.3/4	2	4	2.3/4	6.3/8	SHSDB51	12.39
16.75	1.7/8	2.1/8	4.1/4	2.7/8	6.3/4	SHSDB54	15.30
19.00	2	2.1/4	4.1/2	3	7.1/4	SHSDB57	18.40