



## Small Bow Shackles

with type A screw collar pin




**Material:** Body and pin high tensile steel  
**Safety Factor:** MBL equals 5 x WLL  
**Standard:** B.S.3032 table 4 - 1958  
**Finish:** Self colour  
**Certificate:** As standard an EC declaration of conformity is supplied, also upon request a certificate of basic raw material  
**Notes:** Hot dipped galvanised also available

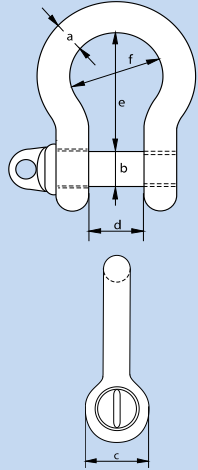


working load limit	diameter bow	diameter pin	diameter eye	inside width	inside length	width bow	product code	weight each
tons	a inch	b inch	c inch	d inch	e inch	f inch		kg
0.50	3/8	1/2	1	5/8	1.1/2	7/8	SHSBS10	0.18
1.00	1/2	5/8	1.1/4	7/8	2	1.1/8	SHSBS13	0.34
1.50	5/8	3/4	1.1/2	1.1/8	2.1/2	1.1/2	SHSBS16	0.62
2.00	3/4	7/8	1.3/4	1.3/8	3	1.3/4	SHSBS19	1.05
3.00	7/8	1	2	1.1/2	3.1/2	2	SHSBS22	1.63
4.00	1	1.1/8	2.1/4	1.3/4	4	2.3/8	SHSBS25	2.28
5.00	1.1/8	1.1/4	2.1/2	2	4.1/2	2.5/8	SHSBS29	3.20
6.25	1.1/4	1.3/8	2.3/4	2.1/4	5	3	SHSBS32	4.54
7.50	1.3/8	1.1/2	3	2.3/8	5.1/2	3.1/4	SHSBS35	5.74
9.25	1.1/2	1.3/4	3.1/2	3.5/8	6	3.1/2	SHSBS38	8.51
10.50	1.5/8	1.7/8	3.3/4	2.7/8	6.1/2	3.7/8	SHSBS44	11.23
12.50	1.3/4	2	4	3.1/8	7	4.1/8	SHSBS51	13.47

## Small Bow Shackles

with type E bolt and nut pin



**Material:** Body and pin high tensile steel  
**Safety Factor:** MBL equals 5 x WLL  
**Standard:** B.S.3032 table 4 - 1958  
**Finish:** Self colour  
**Certificate:** As standard an EC declaration of conformity is supplied, upon request a certificate of basic raw material  
**Notes:** Hot dipped galvanised also available

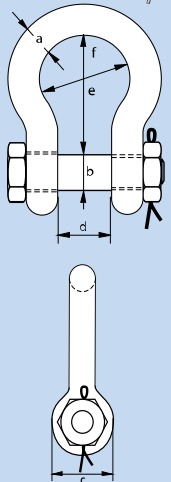

working load limit	diameter bow	diameter pin	diameter eye	inside width	inside length	width bow	product code	weight each
tons	a inch	b inch	c inch	d inch	e inch	f inch		kg
0.50	3/8	1/2	1	5/8	1.1/2	7/8	SHSBB13	0.20
1.00	1/2	5/8	1.1/4	7/8	2	1.1/8	SHSBB16	0.38
1.50	5/8	3/4	1.1/2	1.1/8	2.1/2	1.1/2	SHSBB19	0.70
2.00	3/4	7/8	1.3/4	1.3/8	3	1.3/4	SHSBB22	1.40
3.00	7/8	1	2	1.1/2	3.1/2	2	SHSBB25	1.80
4.00	1	1.1/8	2.1/4	1.3/4	4	2.3/8	SHSBB29	2.61
5.00	1.1/8	1.1/4	2.1/2	2	4.1/2	2.5/8	SHSBB32	3.60
6.25	1.1/4	1.3/8	2.3/4	2.1/4	5	3	SHSBB35	5.00
7.50	1.3/8	1.1/2	3	2.3/8	5.1/2	3.1/4	SHSBB38	6.50
9.25	1.1/2	1.3/4	3.1/2	2.5/8	6	3.1/2	SHSBB44	8.90
10.50	1.5/8	1.7/8	3.3/4	2.7/8	6.1/2	3.7/8	SHSBB48	12.30
12.50	1.3/4	2	4	3.1/8	7	4.1/8	SHSBB51	14.98