


## Green Pin® Heavy Duty Bow Shackles P-6036

with safety bolt

**Material:** Body and pin alloy steel, Grade 8, quenched and tempered  
**Safety Factor:** MBL equals 5 x WLL  
**Finish:** Bow painted silver, pin painted green (120 ton shackle hot dipped galv)  
**Certificate:** As standard an EC declaration of conformity is supplied, also upon request a certificate of basic raw material and manufacturer test certificate. All shackles starting from 150 tons are supplied with a Lloyd's Register of Shipping certificate on proof load  
**Note:** Plus 5% forging tolerance on inside width and length

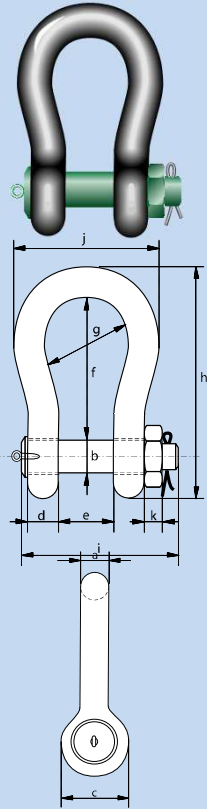


working load limit	bow dia	pin dia	eye dia	width eye	width inside	length inside	width bow	length bolt	length bolt	width nut	width nut	product code	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm		kg
120	95	95	208	91	147	400	238	667	440	428	50	SGHBB95	110
150	105	108	238	102	169	410	275	688	490	485	60	SGHBB108	160
200	120	130	279	113	179	513	290	838	520	530	60	SGHBB130	235
250	130	140	299	118	205	554	305	904	560	565	65	SGHBB140	285
300	140	150	325	123	205	618	305	996	575	585	70	SGHBB150	340
400	170	175	376	164	231	668	325	1114	690	665	70	SGHBB175	560
500	180	185	398	164	256	718	350	1190	720	710	70	SGHBB185	685
600	200	205	444	189	282	718	375	1243	810	775	70	SGHBB205	880
700	210	215	454	204	308	718	400	1263	870	820	70	SGHBB215	980
800	210	220	464	204	308	718	400	1270	870	820	70	SGHBB220	1100
900	220	230	485	215	328	718	420	1296	920	860	70	SGHBB230	1280
1000	240	240	515	215	349	718	420	1336	940	900	70	SGHBB240	1460
1250	260	270	585	230	369	768	450	1456	1025	970	70	SGHBB270	1990
1500	280	290	625	230	369	818	450	1556	1025	1010	70	SGHBB290	2400

## Green Pin® Super Bow Shackles G-5263

with safety bolt

**Material:** Bow and pin alloy steel, Grade 8, quenched and tempered  
**Safety Factor:** MBL equals 5 x WLL  
**Standard:** Meets performance requirements of US Fed Spec RR-C-271, Type IVA Class 3, Grade B  
**Finish:** Hot dipped galvanised (175 ton shackle is painted)  
**Certificate:** As standard an EC declaration of conformity is supplied, also upon request a certificate of basic raw material and manufacturer test certificate. All shackles starting from 150 tons are supplied with a Lloyd's Register of Shipping certificate on proof load

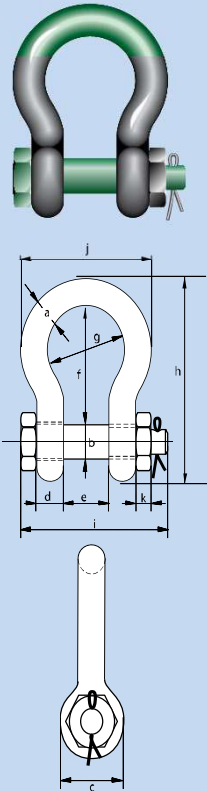

working load limit	bow dia	pin dia	eye dia	width eye	width inside	length inside	width bow	length bolt	length bolt	width nut	width nut	product code	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm		kg
3.3	13.5	16	34	13	22	51	32	89	82	58	13	SGUBB16	0.44
5	16	19	40	16	27	64	43	110	98	75	17	SGUBB19	0.79
7	19	22	46	19	31	76	51	129	114	89	19	SGUBB22	1.26
9.5	22	25	52	22	36	83	58	144	130	102	22	SGUBB25	1.88
12.5	25	28	59	25	43	95	68	164	150	118	25	SGUBB28	2.78
15	28	32	66	28	47	108	75	185	166	131	27	SGUBB32	3.87
18	32	35	72	32	51	115	83	201	178	147	30	SGUBB35	5.26
21	35	38	80	35	57	133	92	227	197	162	33	SGUBB38	6.94
30	38	42	88	38	60	146	99	249	202	175	19	SGUBB42	8.79
40	45	50	103	45	74	178	126	300	249	216	23	SGUBB50	15.00
55	57	57	117	57	83	197	138	341	286	252	26	SGUBB57	22.70
85	70	70	143	70	105	260	180	437	344	320	32	SGUBB70	43.20
120	83	83	162	83	127	329	190	535	403	356	40	SGUBB83	70.50
150*	95	95	208	91	147	400	238	647	511	428	50	SGUBB95	110.00
175*	105	108	238	102	169	410	275	688	561	485	60	SGUBB108	160.00

\* = round headed bolt