


## Green Pin® Sling Bow Shackles P-6033

with safety bolt

**Material:** Body and pin high tensile steel, Grade 8, quenched and tempered  
**Safety Factor:** MBL equals 5 x WLL  
**Finish:** Bow painted silver, pin painted green  
**Temp Range:** Minus 20°C up to 200°C  
**Certificate:** As standard an EC declaration of conformity is supplied, also upon request a basic raw material cert, manufacturer test cert, and works cert. All shackles are supplied with a Lloyd's Register of Shipping Certificate on proof load, an MPI certificate and/or US inspection certificate can be supplied on request

**Note:** Plus 5% forging tolerance on inside width and length

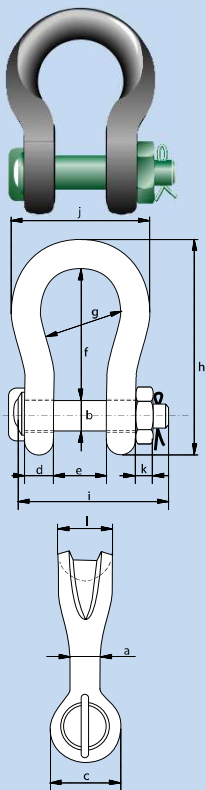


WLL	dia body	dia pin	dia eye	width eye	width inside	length inside	width bow	length	width	width	width nut	bearing surface	product code	weight each
tons	a	b	c	d	e	f	g	h	i	j	k	l		kg
18	35	35	69	30	52	147	102	239	165	180	29	64	SGLBB35	7
30	40	42	90	35	69	165	126	279	207	200	34	79	SGLBB42	13
40	55	51	109	45	84	199	140	331	252	235	38	97	SGLBB51	21
55	60	57	115	55	90	240	160	389	294	270	45	100	SGLBB57	30
75	68	70	125	54	110	290	185	473	327	317	54	120	SGLBB70	48
125	85	80	154	85	137	366	220	583	426	390	64	150	SGLBB80	92
150	94	95	179	89	147	391	253	645	435	434	50	170	SGLBB95	140
200	110	105	199	100	158	481	280	759	470	482	50	205	SGLBB105	205
250	126	120	227	110	179	542	300	859	519	530	60	240	SGLBB120	254
300	135	134	245	122	195	601	350	947	575	620	70	265	SGLBB134	360
400	160	160	293	145	231	576	370	985	675	690	80	320	SGLBB160	580
500	170	180	328	160	263	681	450	1131	748	790	90	339	SGLBB180	780
600	190	200	348	170	289	741	490	1234	809	865	100	370	SGLBB200	980
700	200	215	392	190	315	751	540	1284	879	901	100	400	SGLBB215	1360
800	218	230	420	200	342	851	554	1426	942	947	110	420	SGLBB230	1430
900	242	255	466	220	368	851	580	1488	1023	1023	120	440	SGLBB255	1650
1000	260	270	490	240	399	851	614	1532	1103	1107	120	460	SGLBB270	2120
1250	285	300	510	260	452	931	650	1666	1227	1182	150	530	SGLBB300	2400
1500	295	320	550	280	483	951	680	1710	1300	1253	150	560	SGLBB320	2980

## Green Pin® Wide Mouth Lifting Shackles G-4263

with safety bolt

**Material:** Body and pin high tensile steel, Grade 8, quenched and tempered  
**Safety Factor:** MBL equals 6 x WLL  
**Finish:** Hot dipped galvanised  
**Certificate:** As standard an EC declaration of conformity is supplied, also upon request a manufacturer test cert, works cert, and inspection cert

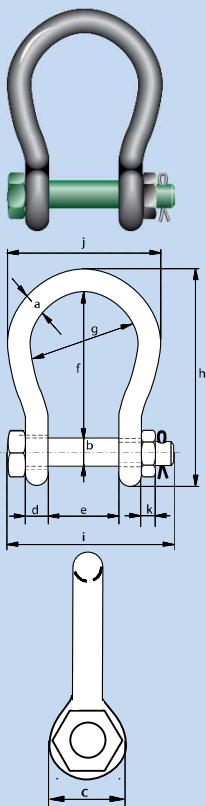

WLL	dia bow	dia pin	dia eye	width eye	width inside	length inside	width bow	length	length bolt	width	width nut	product code	weight each
tons	a	b	c	d	e	f	g	h	i	j	k		kg
4.75	22	25	52	22	63	112	88	173	157	132	23	SGWBB25	2.08
6.5	25	28	59	25	75	135	105	204	182	155	25	SGWBB28	3.14
8.5	28	32	66	28	82	148	115	225	201	171	28	SGWBB32	4.36
9.5	32	35	72	32	90	162	126	248	217	190	31	SGWBB35	5.95
12	35	38	79	35	100	180	140	274	240	210	34	SGWBB38	7.87
16	38	42	88	38	106	216	159	319	248	235	19	SGWBB42	12.5
25	45	50	103	45	127	248	175	370	296	265	24	SGWBB50	18
30	50	57	118	50	146	273	207	411	338	307	27	SGWBB57	25
55	65	70	145	65	165	314	213	487	389	343	33	SGWBB70	48
75	75	83	163	75	184	330	254	530	432	404	40	SGWBB83	70